



Nokia XL Dual Sim Front Camera Replacement

How to replace the front facing camera.

Written By: Shadeed Bilal



INTRODUCTION

Use this guide on your quest to becoming a "selfie master" by replacing a damaged or non-functioning front facing camera on your Nokia XL Dual Sim.



TOOLS:

- [iFixit Opening Tools](#) (1)
 - [T5 Torx Screwdriver](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Back Cover Removal




- You will first need to separate the back cover from the device.
- Gently pry open each side of the device at the indicated locations. It is best to use a plastic opening tool or similar item.

Step 2 — Battery Removal




- Once the back cover is removed, the battery will be in plain sight. It will need to be removed.
- You can use a plastic opening tool to lift the battery. From there, you can simply remove it.

Step 3 — Screen Separation part 1

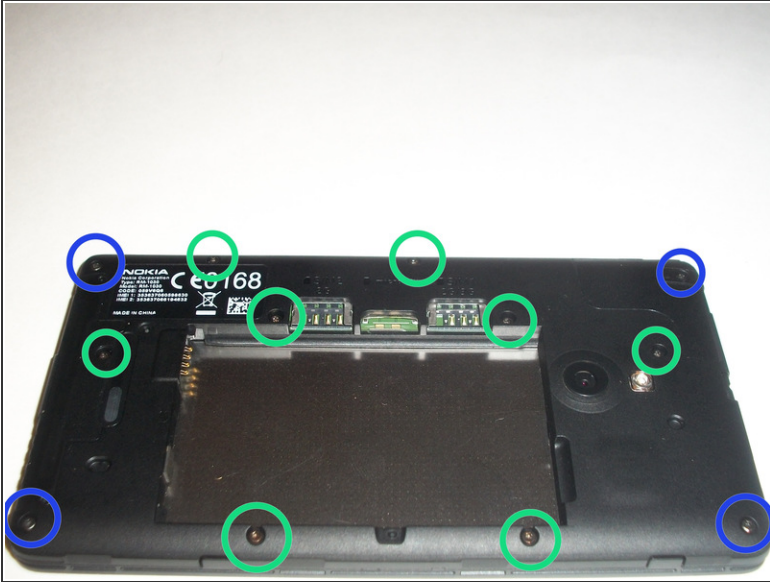

- To access the inner components of the device, you will need to remove the various screws that are on the device
- ⓘ You will need a T5 Precision Torx screw driver to remove the screws.
- The locations of the T5x3.4mm screws are indicated in the picture.
- The locations of the T5x4.1mm screws are indicated in the picture.


Step 4 — Screen Separation part 2

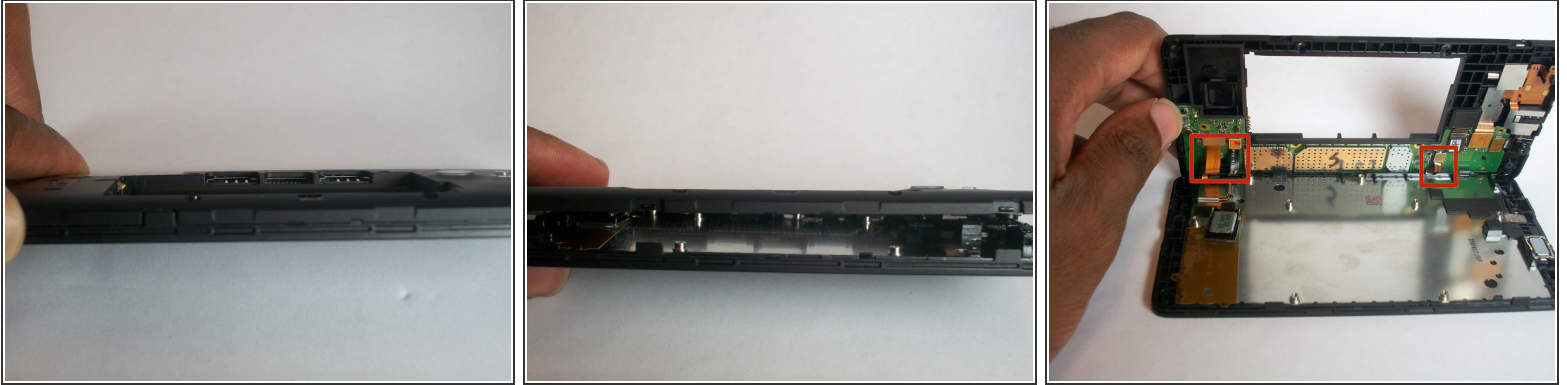

- You will need to use the plastic opening tool to gently pry the device apart.
- There are flaps on both sides of the phone as indicated in the picture. This is what you will need to pry apart.


⚠ Please be cautious when opening the device. There are various connectors inside the device that must be handled with care.

Step 5 — System components

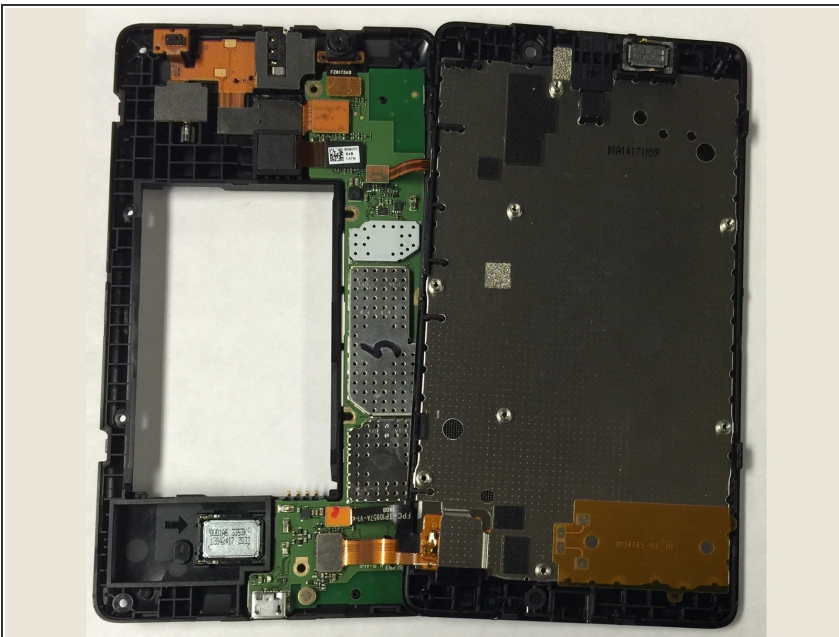

- Once the device is opened you can take note of all the components

Step 6 — Camera Removal

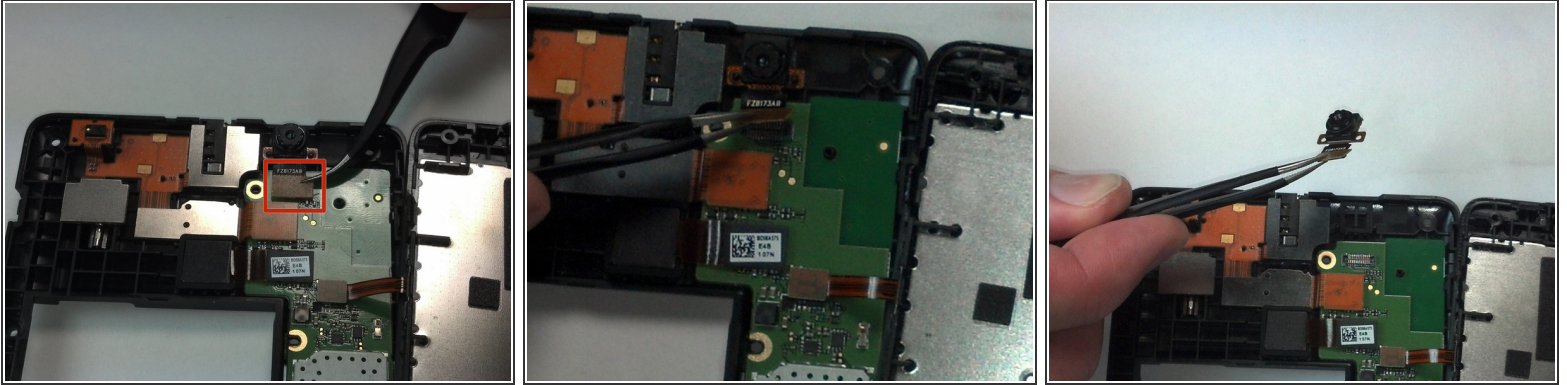

- With Tweezers, gently unsnap the front camera motherboard connector.
- The front camera component can now be gently removed.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-23 02:33:36 PM.